


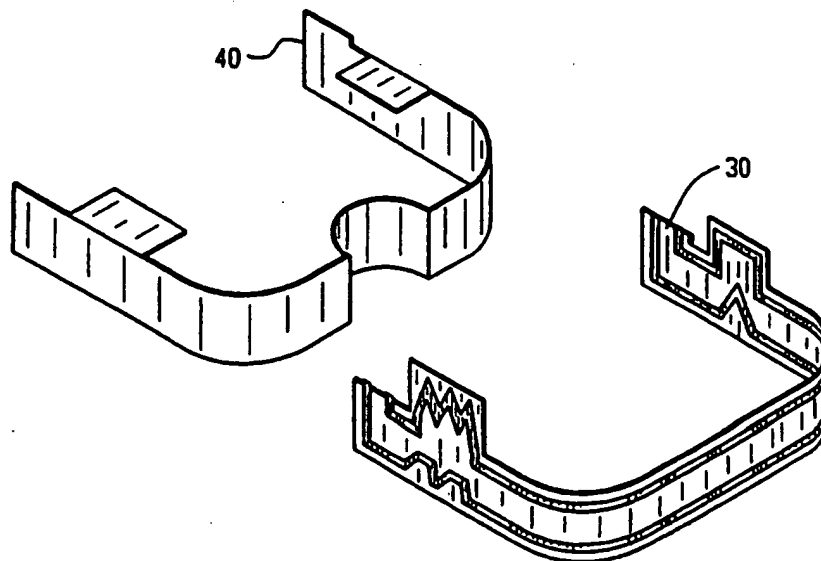

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>H01Q 1/24, 1/38, 1/36</b>	<b>A1</b>	(11) International Publication Number: <b>WO 00/01028</b> (43) International Publication Date: <b>6 January 2000 (06.01.00)</b>
<p>(21) International Application Number: <b>PCT/CA99/00602</b></p> <p>(22) International Filing Date: <b>28 June 1999 (28.06.99)</b></p> <p>(30) Priority Data: <b>09/105,354</b>      <b>26 June 1998 (26.06.98)</b>      <b>US</b></p> <p>(71) Applicant: <b>RESEARCH IN MOTION LIMITED [CA/CA];</b> <b>295 Phillip Street, Waterloo, Ontario N2L 3W8 (CA).</b></p> <p>(72) Inventors: <b>JARMUSZEWSKI, Perry; 31 Hood Street, Guelph, Ontario N1E 5W4 (CA). QI, Yihong; 698 Keatswood Cr., Waterloo, Ontario N2T 2R6 (CA). ZHU, Lihong; 661 Keatswood Cr., Waterloo, Ontario N2T 2R7 (CA). EDMONSON, Peter; 138 Stone Church Road E., Hamilton, Ontario L9B 1A9 (CA). BANDURSKA, Krystyna; 623A Rubbelhardt Drive, Waterloo, Ontario N2T 2K7 (CA). GRANT, Robert, A.; 425 Cole Road, Guelph, Ontario N1G 3E9 (CA).</b></p> <p>(74) Agent: <b>PERRY, Stephen, J.; Sim &amp; McBurney, 6th floor, 330 University Avenue, Toronto, Ontario M5G 1R7 (CA).</b></p>	<p>(81) Designated States: <b>AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZA, ZW.</b> <b>ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW). Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM). European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</b></p> <p><b>Published</b> <i>With international search report.</i></p>	

(54) Title: **DUAL EMBEDDED ANTENNA FOR AN RF DATA COMMUNICATIONS DEVICE**

## (57) Abstract

An RF antenna system is disclosed having at least one meandering antenna line with an aggregate structure formed to substantially extend in two dimensions, to effectively form a dipole antenna. The meandering antenna line includes at least one localized bend for providing a compressed effective antenna length in a compact package. The present antenna can be made as an antenna system having discrete transmit and receive antenna lines, so as to form a dual antenna system. The localized bends on each line electromagnetically couple with the respective bends on the other line, thus increasing electromagnetic coupling efficiency, thereby increasing antenna bandwidth and gain.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakistan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

-1-

**DUAL EMBEDDED ANTENNA FOR AN RF DATA  
COMMUNICATIONS DEVICE**

5

**Background of the Invention**

The present invention is directed to the field of antennas used for RF data communications devices, particularly those used to transmit and receive digital signals, e.g., two-way pagers and the like. The antennas used with  
10 previous RF data communications devices are prone to significant problems. Many previous pagers are "one-way" pagers that are only able to receive a pager signal. However, many factors can contribute to the loss of an incoming message signal. Thus, it is desirable to employ a "two-way" pager that sends an acknowledgment signal to the remote station to confirm receipt of a  
15 message or to originate a message.

In previous VHF one-way pagers, it had been common to use a loop-type antenna, which is effective at receiving signals in the presence of the human body, which has properties that tend to enhance VHF radio signals. However, loop-type antennas are poor at the UHF frequencies needed for  
20 two-way pagers. Also, such antennas are typically embedded in a dielectric plastic pager body, which reduces the effective bandwidth of the received signal. Such a configuration has a very narrow bandwidth of typically about 1%. Such antennas also have poor gain performance when transmitting a signal, and are thus not useful for a two-way pager design.

25 Many previous two-way telecommunications devices use a "patch" antenna, in which a large, flat conducting member is used for sending and receiving signals. Patch antennas permit two-way communication under certain

-2-

narrow bandwidth conditions, but do not provide a desirable radiation pattern. Signals propagate perpendicular to the flat surfaces of the antenna, and so the acknowledgment signal diverges within a bi-lobed conical envelope along an axis of propagation. While the signal transmits well "in front" and "behind" the pager, performance is poor if the signal axis is not well aligned with the remote station. Also, patch antennas are large, and can be as large as 16 x 16 cm<sup>2</sup>. While this may be fine for a mobile laptop computer, such is not well suited for a small hand-held mobile unit such as a pager. Patch antennas can be made smaller, but at a significant sacrifice of gain.

10           An improved two-way pager antenna design is shown in U.S. Serial No. 08/715,347, filed September 18, 1996, entitled "Antenna System For An RF Data Communications Device." This design incorporates a dipole antenna capable of sending and receiving signals having both vertical and horizontal polarization components, thereby increasing the likelihood of acquiring the  
15   signal. The dipole antenna is incorporated into the pager lid and anisotropically coupled to the LCD pager display element. This coupling effect divides the central frequency into two separate peaks, thereby increasing pager bandwidth.

          While excellent under ideal conditions, the coupling effect varies as a function of the spatial distance separating the LCD, variations in the  
20   anisotropic composition of the LCD, and ground planes of the pager circuit boards. As the lid is opened and closed, antenna gain can vary between 0 to 1 dB and -1 to 0 dB. Also, as this distance varies, the center frequency changes, affecting the antenna's very wide bandwidth. These effects tend to degrade antenna performance in either send or receive modes.

25           The above-noted design incorporates a RF switch to change the antenna between transmit and receive modes. This switch is expensive and very fragile to electrostatic discharge, adding expense to the manufacture and

-3-

5 maintenance of the unit. Also, this switch is lossy, reducing antenna gain by about 0.5 dB. Further, with this design, LCD placement with respect to the antenna is critical, requiring fine tuning and tight manufacturing tolerances, resulting in labor-intensive (and thus expensive) manufacturing. Also, with the previous antenna design, impedance matching with the radio circuit is difficult. Testing the previous antenna is difficult since it could only be tested in an assembled pager, and so antenna failures contribute to unit failures during testing. Also, the antenna tends to interfere with the radio components in the pager, thereby further reducing performance.

10

#### **Brief Description of the Invention**

In view of the drawbacks and disadvantages associated with previous systems, there is a need for an RF communications antenna system that enables reliable two-way communication.

15 There is also a need for a two-way RF communications antenna system that provides a uniform radiation pattern within 360 degrees of azimuth.

There is also a need for an RF antenna system that is insensitive to variations in environmental conditions.

20 There is also a need for an RF antenna system that is simple in construction and can be manufactured with relaxed tolerances.

There is also a need for an RF antenna system that can be easily tested.

25 These needs and others are satisfied by the present invention in which a RF antenna system is provided having at least one meandering antenna line with an aggregate structure formed to substantially extend in two dimensions, to effectively form a half-wave, top-loaded monopole antenna. The meandering antenna line includes at least one localized bend for providing a compressed effective physical antenna length in a compact package. The present antenna

-4-

can be made as an antenna system having discrete transmit and receive antenna lines, so as to form a dual antenna system. The localized bends on each line couple with the respective bends on the other line, thus increasing electromagnetic coupling efficiency, thereby increasing overall antenna bandwidth and efficiency.

As will be appreciated, the invention is capable of other and different embodiments, and its several details are capable of modifications in various respects, all without departing from the invention. Accordingly, the drawings and description are to be regarded as illustrative in nature and not restrictive.

10

#### **Brief Description of the Drawings**

Fig. 1 shows a dual antenna system as according to the present invention.

Fig. 2 is an exploded view depicting the dual antenna system of the present invention.

15

#### **Detailed Description of the Invention**

As depicted in Fig. 1, the present invention incorporates an antenna system 10 including at least one antenna element 12 with a meandering line structure. The aggregate structure of this antenna element 12 is formed so that it substantially extends in two dimensions, effectively forming a half-wave, top-loaded monopole antenna from a single antenna line capable of transceiving vertical and horizontal polarization components of a signal. As a further benefit, this meandering aggregate structure permits the antenna to have a comparatively long effective length compressed to a smaller size, e.g., within a pager housing.

20

25

-5-

As an additional feature, the present meandering antenna line 12 can include one or more extended portions 14, each having one or more localized bends 16. These localized bends 16 provide further compression of the antenna length. For example, a 16 cm antenna (corresponding to the half-wavelength  
5 of approximately a 900 MHz signal) can be preferably compressed in a 8.5 x 6 cm pager body in the manner illustrated in Fig. 1. In principle, even greater lengths can be compressed into smaller bodies by increasing the number of bends 16, providing greatly improved efficiency. The present design provides excellent radiation pattern characteristics, providing an  
10 omnidirectional "doughnut" radiation pattern that propagates in 360 degrees of azimuth.

The present antenna system 10 can include a single meandering antenna line 12, but in the preferred embodiment, the present antenna system 10 can include plural distinct meandering lines. In the preferred embodiment, as  
15 illustrated in Fig. 1, the present antenna system includes two meandering antenna lines 12, 22, where one of the lines 12, 22 is a transmit (Tx) antenna and the respective other line 12, 22 is a receiving (Rx) antenna. In the embodiment shown, the line 12 is preferably the Tx line and the line 22 is preferably the Rx line. The Tx line is preferably positioned to provide an  
20 advantageous transmission pattern with respect to the geometry of the internal pager components, so as to insure transmission to the remote station. This permits two separate narrowband channels to be used for Rx and Tx signals, rather than one wideband channel, as with the previous single antenna designs. By providing two center frequencies, the bandwidth extremities are reduced.  
25 Also, each antenna line 12, 22 can interface directly with the radio circuits, thereby eliminating the send/receive RF switch used with previous single antennas. In this way, the present antenna reduced complexity and cost by

-6-

eliminating the expensive and fragile switch and the software required to actuate it. Further, antenna gain is increased, since the switch was lossy. The antenna lines 12, 22 are joined by a connector 24, which includes a matching circuit, and can be formed on the circuit board. In these ways and others, radio  
5 performance is improved with the present antenna.

The present antenna is also less sensitive to the physical presence of the operator, since its design, determined by its geometry and matching circuit selection, will interact with the actual close pager environment first, and any other ambient interventions second. This therefore results in a 3 to 7 dB  
10 improvement in gain over previous VHF loop antennas, greatly improving the reception and transmission characteristics of the system.

Each meandering antenna line 12, 22 includes its own localized bends 16, 26. In the preferred embodiment, the bends 16, 26 are placed substantially adjacent. Applicants have observed that, in addition to providing greater  
15 effective antenna length, the adjacent bends 16, 26 also produce an electromagnetic coupling effect similar to that discussed in the aforementioned U.S. Serial No. 08/715,347, the disclosure of which is hereby incorporated by reference. The localized bends 16, 26 provide greater concentrated current per unit length, which affects the coupling coefficient, permitting more effective  
20 coupling with the adjacent line. The coupling is described in Table 1 as follows:

Table 1

	<u>Frequency</u>	<u>Coupling</u>
	896 MHz	6 dB
25	897 MHz	6 dB
	898 MHz	6 dB
	899 MHz	6 dB



-7-

900 MHz	6 dB
901 MHz	6 dB
902 MHz	5 dB

Each antenna line 12, 22 has an associated eigenvector, and without  
5 coupling, these eigenvectors overlap along a common bandwidth. The  
coupling effect between the adjacent bends 16, 26 causes a separation of  
eigenvectors, in which the eigenvectors split asymmetrically about a central  
frequency, resulting in an increased effective bandwidth for the dual antenna  
system. Through the coupling effect, each meandering antenna line 12, 22 has  
10 the effective bandwidth of the coupled system. This coupling is accomplished  
without the LCD anisotropic media used in the U.S. Serial No. 08/715,347,  
and so the present invention provides excellent results without being sensitive  
to the proximity problems of the previous device.

As best seen in Fig. 2, the meandering lines 12, 22 of the present dual  
15 antenna system are formed on a flexible substrate, e.g., a plastic dielectric  
retainer. The retainer 40 is formed of a plastic dielectric material which can be  
easily shaped to create the desired configuration. Also, the meandering lines  
12, 22 can easily be formed directly on the flexboard 30 by etching a desired  
pattern directly onto a copper layer on the flexible circuit board material. In  
20 the way, any desired line pattern can be created simply and economically,  
permitting precise control of current densities along the antenna assembly.

Additionally, the retainer 40 assists in coupling between the lines due to  
the dielectric properties of the plastic material. The retainer 40 also creates a  
partial barrier between the antenna system and the pager circuit board, as the  
25 dielectric material is somewhat dispersive of the electromagnetic wave, moving  
the energy out of the bandwidth of the radio, and reducing interference.

-8-

The retainer 40 also makes the antenna 10 a modular component that can be easily installed or removed from the pager unit. Also, the antenna assembly can now be tested as a discrete unit, permitting the discovery of antenna faults prior to assembly. In this way, the present antenna assembly  
5 improves reliability and reduces the cost of manufacture by reducing pager unit failures due to antenna faults.

The present antenna system 10 can also be designed to include a high current portion 32 to make the antenna insensitive to the presence of metal components in close proximity to the antenna, such as metal fasteners and the  
10 like. The high current portion 32 is effectively a built-in short circuit that precludes shorts due to the metal components. This effect is controlled by altering the effective electrical length of the antenna to create a phase shift of the antenna structure at the desired resonant frequency. This phase shift permits the placement of a voltage null, corresponding to a current peak, at a  
15 desired location, thus reducing sensitivity to metal components. This result can also be obtained and/or enhanced by adjusting the matching circuits and the meanders in the antenna lines 12, 22.

The design of the present invention provides an antenna that is first matched for the physical structure of the pager, i.e., batteries, LCD, and radio  
20 components. Secondly, the present antenna is matched for environmental factors such as metal components. Third, the antenna is matched for impedance with the radio. These factors result in an antenna that is insensitive to environmental factors. The present antenna system is easier to manufacture than previous systems, and requires less critical placement of the components.  
25 Also, since the bandwidth is derived from the coupling effect, the present invention eliminates the tuning circuits from the matching networks of previous antennas, thus avoiding the matching problems encountered with other wide

-9-

bandwidth antennas. Further, the tolerances of components in the pager system used with the present invention are reduced, and construction is simplified.

As described hereinabove, the present invention solves many problems associated with previous systems, and presents many improvements in  
5 efficiency and operability. However, it will be appreciated that various changes in the details, materials and arrangements of parts which have been herein described and illustrated in order to explain the nature of the invention may be made by those skilled in the art within the principle and scope of the invention as expressed by the appended claims.

-10-

**We claim:**

1. An antenna system for an RF data communications device comprising:  
at least one meandering antenna line having an aggregate  
5 structure formed so as to substantially extend in two dimensions, so as to effectively form a top-loaded monopole antenna, wherein the meandering antenna line includes at least one localized bend for providing a compressed effective antenna length in a compact package.
- 10 2. The antenna system of claim 1 wherein the meandering antenna line is formed onto a flexible substrate and affixed to a rigid dielectric retainer.
3. The antenna system of claim 1 wherein at least one meandering antenna line comprises a receive antenna line and a transmit antenna line so as  
15 to form a dual antenna system.
4. The antenna system of claim 3, wherein the respective at least one localized bend on each line increases electromagnetic coupling efficiency with the respective other line.  
20
5. The antenna system of claim 3 wherein each respective antenna line is tuned for a separate bandwidth.
6. The antenna system of claim 1 wherein at least one antenna line  
25 further comprises at least one high current portion for reducing interference from close proximity metal components.

-11-

7. A dual antenna system for an RF data communications device comprising:



- a receive antenna comprising a first meandering antenna line having an aggregate structure formed so as to substantially extend in two dimensions, so as to effectively form a dipole antenna, wherein the first meandering antenna line includes at least one localized bend; and
- a transmit antenna comprising a second meandering antenna line having an aggregate structure formed so as to substantially extend in two dimensions, so as to effectively form a top-loaded monopole antenna, wherein the second meandering antenna line also includes at least one localized bend.

8. The dual antenna system of claim 7, wherein the respective at least one localized bend on each line increases electromagnetic coupling efficiency with the respective other line.

9. The dual antenna system of claim 7 wherein each respective antenna line is tuned for a separate bandwidth.

10. The dual antenna system of claim 7 wherein the meandering antenna lines are formed onto a flexible substrate and affixed to a rigid dielectric retainer.

11. The dual antenna system of claim 7 wherein at least one of said antenna lines further comprise at least one high current portion for reducing interference from close proximity metal components.

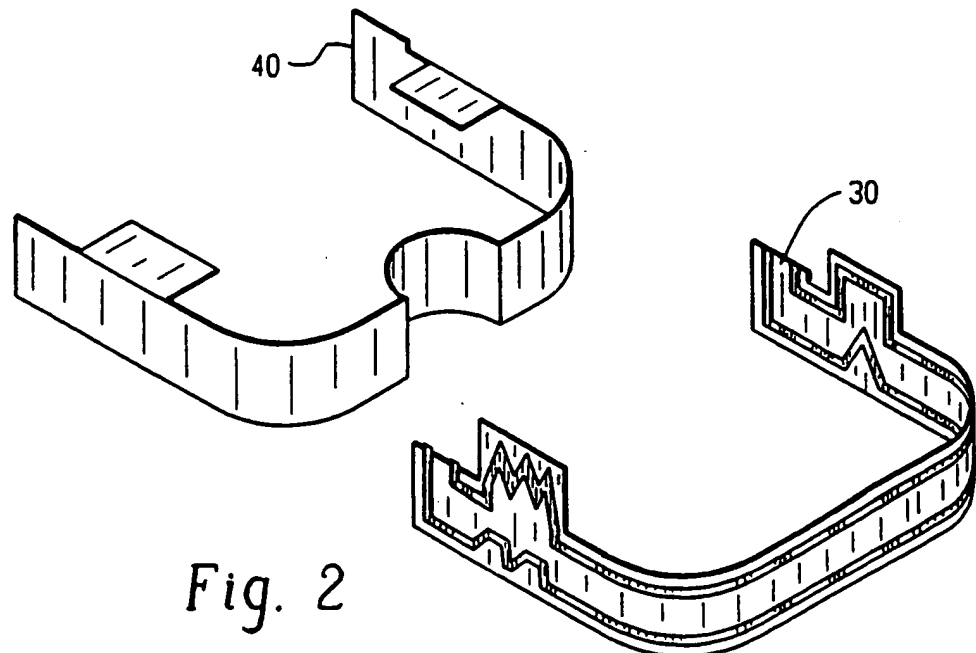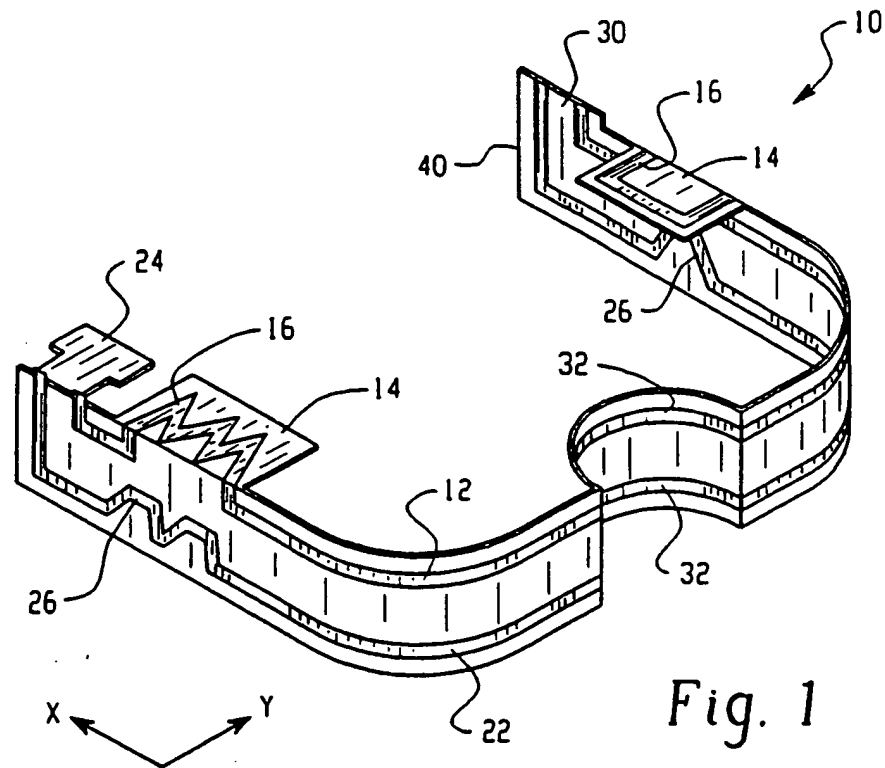

# INTERNATIONAL SEARCH REPORT

International Application No

PL/CA 99/00602

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 H01Q1/24 H01Q1/38 H01Q1/36

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H01Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	PATENT ABSTRACTS OF JAPAN vol. 017, no. 264 (E-1370), 24 May 1993 (1993-05-24) -& JP 05 007109 A (MITSUBISHI ELECTRIC CORP), 14 January 1993 (1993-01-14) abstract; figures 1-3,5-7	1,3,5,7, 9
Y	---	2,10
Y	PATENT ABSTRACTS OF JAPAN vol. 018, no. 188 (E-1532), 31 March 1994 (1994-03-31) -& JP 05 347507 A (JUNKOSHA CO LTD), 27 December 1993 (1993-12-27) abstract; figures 1-19 ---	2,10
	-/--	

☒ Further documents are listed in the continuation of box C

☒ Patent family members are listed in annex

### \* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

14 October 1999

Date of mailing of the international search report

21/10/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Angrabeit, F

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/CA 99/00602

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P,X	WO 99 03166 A (ALLGON AB ; ROWELL CORBETT (SE); STRAND JOHAN (SE); GAMALIELSSON JO) 21 January 1999 (1999-01-21) page 1, line 8-11 page 2, line 26-34 page 3, line 8-23 page 6, line 4 -page 7, line 21 page 11, line 11 -page 13, line 32; figures 1,11-17 ---	1-5,7-10
A	EP 0 814 536 A (YOKOWO SEISAKUSHO KK) 29 December 1997 (1997-12-29) column 18, line 1-45 column 22, line 9-34 column 29, line 47 -column 31, line 48 column 38, line 42 -column 39, line 12 figures 3,4,7,13-15,22,23 ---	1,2,7,10
P,X	GB 2 330 951 A (NOKIA MOBILE PHONES LTD) 5 May 1999 (1999-05-05) page 5, line 22-28; figures 1,3,5 ---	1,6,7,11
P,X	WO 99 25042 A (ERICSSON TELEFON AB L M) 20 May 1999 (1999-05-20) page 6, line 4 -page 10, line 22; figures 5-7 ---	1,3-5, 7-9
A	WO 96 38881 A (ERICSSON GE MOBILE INC) 5 December 1996 (1996-12-05) the whole document -----	1,3-5, 7-9



# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PL./CA 99/00602

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
JP 05007109 A	14-01-1993	JP 2653277 B	17-09-1997
JP 05347507 A	27-12-1993	NONE	
WO 9903166 A	21-01-1999	SE 511501 C	11-10-1999
		AU 7560398 A	08-02-1999
		AU 8365998 A	08-02-1999
		SE 9702659 A	10-01-1999
		WO 9903168 A	21-01-1999
EP 0814536 A	29-12-1997	JP 2898921 B	02-06-1999
		JP 10013135 A	16-01-1998
		JP 10056314 A	24-02-1998
		JP 10056315 A	24-02-1998
		JP 10056311 A	24-02-1998
		CN 1171641 A	28-01-1998
GB 2330951 A	05-05-1999	JP 11205021 A	30-07-1999
		SE 9803726 A	05-05-1999
WO 9925042 A	20-05-1999	SE 511131 C	09-08-1999
		AU 9769298 A	31-05-1999
		SE 9704051 A	07-05-1999
WO 9638881 A	05-12-1996	AU 708187 B	29-07-1999
		AU 5955696 A	18-12-1996
		BR 9608617 A	04-05-1999
		CN 1191635 A	26-08-1998
		EP 0829112 A	18-03-1998
		JP 11506282 T	02-06-1999
		US 5828342 A	27-10-1998